


Steel components Speedy A

Product specifications

Type of corrosion protection:

- Zn 90% + Al 10%
- Class A according to EN-10244-2

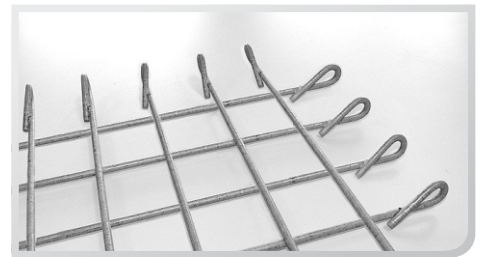

Product description:

Steel components **Speedy A** are made of steel wire with patented corrosion protection (*Bezinal 2000*), which has five times the durability compared with conventional hot-dip galvanizing. They are used for the construction of retaining walls, steep slopes or gabion structures.

- 1 large selection of components provides a wide technical variability
- 2 simple and quick assembly elements

Legend of named components:

Panel MS-N 0510 A 100x50 cm	
<i>Speedy panel type</i> —	<i>mesh size in the direction of longer and the shorter dimension of panel</i>
<i>designation the wire diameter</i> —	
Connector CS-H A 100 cm	
<i>rod connector type Speedy</i> —	<i>designation the wire diameter</i>
Separator S2-N A 50 cm	
<i>double-curved separator</i> —	<i>designation the wire diameter</i>

Název prvku	Typ prvku	Průměr drátu [mm]	Orientační hmotnost [kg]	Délka [cm]	Šířka [cm]	Velikost oka	
						podélně [cm]	příčně [cm]
MS-N 1010 A 200x50 cm	Panel	4	2,30	200	50	10	10
MS-N 1010 A 200x70 cm	Panel	4	3,10	200	70	10	10
MS-S 1010 A 200x50 cm	Panel	5	3,50	200	50	10	10
MS-S 1010 A 200x70 cm	Panel	5	4,80	200	70	10	10
Connector CS-H A 100 cm	Connector (rod)	6	0,26	100	—	—	—
Connector CS-H A 200 cm	Connector (rod)	6	0,48	200	—	—	—
Connector CS-H A 50 cm	Connector (rod)	6	0,15	50	—	—	—
Connector CS-H A 70 cm	Connector (rod)	6	0,20	70	—	—	—
Separator S1-N A 100 cm	Separator	4	0,11	100	—	—	—
Separator S2-S A 30 cm	Separator	5	0,08	30	—	—	—
Separator S2-S A 34 cm	Separator	5	0,08	34	—	—	—
Separator S2-S A 60 cm	Separator	5	0,12	60	—	—	—
Separator S2-S A 68 cm	Separator	5	0,13	68	—	—	—

Supplier of product: **GEOMAT s.r.o.**

More information about this product on www.geomat.eu

